



Temperature range: **-12°C/-18°C**

Refrigerating unit:

Refrigerant/Cooling factor: **R404A / R507**

Specifications	JOLA 700.1 AG M
CODE	JO100.1/AG/M
Length [mm]	818
Capacity [dm ³]	700
Working capacity of the chamber [dm ³]	700
The area of shelves [m ²]	2,2
Exhibition area [m ²]	1,11
Polyurethane foam insulation thickness [mm]	40
Depth [mm]	740
Height [mm]	2035 +/10
Unit weight [kg]	130
Shelves dimensions [mm]	510x710
Maximum load [kg/m]	30
Refrigerant/Cooling factor	R404A / R507
Evaporating temperature [°C]	-30
Rated voltage [V]	230/50Hz
Rated power of lighting [W]	17
Rated power [W]	797
Cooling power [W]	718
Rated power of electric heaters [W]	100
Rated power of the evaporator heater [W]	505
Electricity consumption [kWh/24h]	10,6

Standard equipment

internal freezing aggregate placed on the top

dynamic cooling (ventilated)

external housing made of coated steel - different colors available (Igloo pattern book)

interior made of white coated steel

self - closing hinged doors with heated combined glass - choice of door opening direction

ecological polyurethane foam insulation

hinged doors self - closer

heated door frame

5 pcs of plastified reticulated shelves, with height adjustment

price stripes - different colors available (IGLOO pattern book)

automatic defrost

automatic condenser vaporization

single vertical interior lighting - LED light

fan stopping switch

electronic temperature controller with digital display (IGLOO)

condenser impurity or fan operation failure alarm

Options

external housing color - different colors available (IGLOO pattern book)

external housing made of stainless steel

interior made of stainless steel

door lock with key

plastified strengthened shelves

chrome reticulated shelves

chrome strengthened reticulated shelves

additional plastified reticulated shelf + handle set

additional plastified reticulated strengthened shelf + handle set

additional chrome reticulated shelf + handle set

additional chrome reticulated strengthened shelf + handle set

internal top and side illumination - LED lights

electronic temperature recorder + software


temperature recorder wire

SMS alarm module + temperature recorder with emergency power supply

USB - MGSM TTL wire for SMS module programming

JOLA 700.1 AG M

818

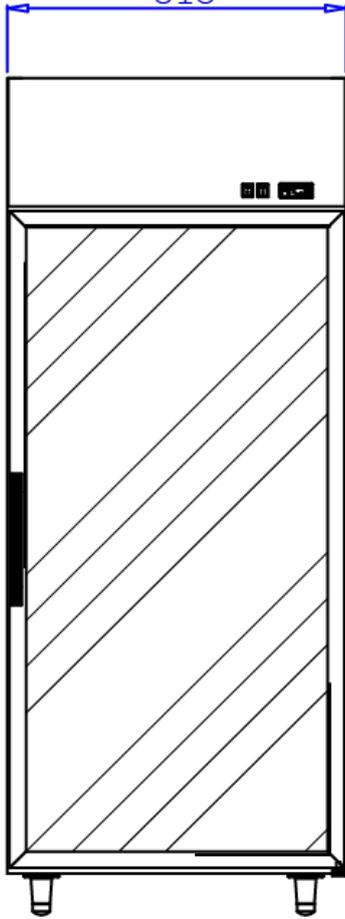

740

